



lighting facts ^{CM}	
A Program of the U.S. DOE	
Light Output (Lumens)	2789
Watts	33.36
Lumens per Watt (Efficacy)	83
Color Accuracy	72
Color Rendering Index (CRI)	
Light Color	
Correlated Color Temperature (CCT)	
6282 (Daylight)	
2700K	3000K
Bright White	Daylight
4500K	6500K
<small>All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.</small>	
<small>Visit www.lightingfacts.com for the Label Reference Guide.</small>	
<small>Registration Number: 364W-8XNXXZ</small>	
<small>Model Number: CL2-02-4000-1</small>	
<small>Type: Circular or square parking garage fixtures</small>	

Specifications:

- Power Source:** 120 / 277 VAC @ 60 Hz
- Rated Power:** 33 Watts
- Comparable:** 150 to 175 Watt HID
- Power Factor:** > .9
- Luminaire Efficiency:** More than 84%
- Luminaire Efficacy:** 83 Lumens/Watt
- Operating Temperature:** -25° C to 70° C
- Color Temperature:** 6200°K
- Size:** 14-1/2" L x 14-1/2" W x 8-1/2" H
- Weight:** 10lbs
- Rated LED Life (Installed @ 25°C):** > 100,000 hours
- Compliance:** FCC Part 15, Subpart B, Class B;
IEEE C62.41.2

Features:


- A Field-serviceable RCLED® Design
- Die Cast Aluminum Body
- Prismatic polycarbonate UV-stabilized diffuser
- Environmentally Friendly, contains No Mercury
- Driver circuit is a power-factor corrected, constant-current design
- 5 Year Warranty; Patent Pending
- Made in USA
- Compliant with UL-1598, UL-8750; UL Listed

Ordering Information:

Model	Series	Design	Voltage
CL2	02	4000	

1 - 120V
 2 - 277V

DOE Lighting Facts Label

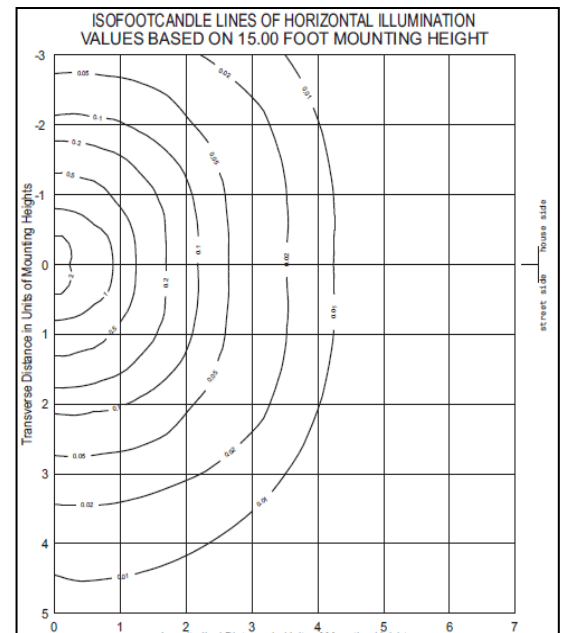

Photometric Isolines – 15' Height

V8.11102010